

WATER BAR RISTORO PLUS

Erogatori Professionali
Water dispenser




PRODUZIONE ACQUA
WATER PRODUCTION

80-130 l/h

CARATTERISTICHE TECNICHE



| | |
|----------------------------|--|
| Rubinetti | 3 |
| Alimentazione | 230 V - 50 Hz |
| Pompa Carbonazione | 180 W pompa a palette 200 l/h |
| Gas | R134A a norma CFC |
| Capacità vasca | 5 Lt |
| Raffreddamento | sistema di refrigerazione a liquido |
| Serpentine | acciaio inossidabile |
| Pressione acqua in entrata | min. 1,5 bar - max 4 bar |
| Sistema di controllo | centralina elettronica controllo livello del ghiaccio, protezione anti-allagamento e protezione mancanza acqua |
| Peso | 35 kg |
| Dimensioni | 520 x 280 x 540 mm - 706 x 352 x 425 mm (P-L-H) |

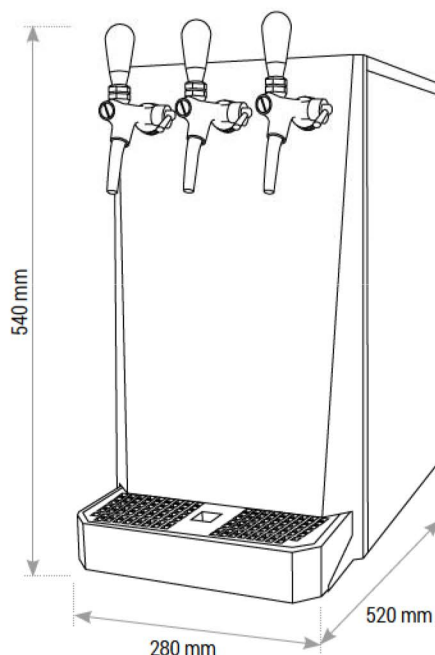

TECHNICAL FEATURES



| | |
|-------------------------|---|
| Taps | 3 |
| Power supply | 230 V - 50 Hz |
| Carbonation pump | 180 W vane pump 200 l/h |
| Gas | R134A in accordance with CFC |
| Ice bank | 5 Lt |
| Cooling | water cooled refrigeration system |
| Cooling | Stainless steel |
| Incoming water pressure | min. 1,5 bar - max 4 bar |
| Control system | electronic control unit level control of ice, anti-flooding system and water supply shortage protection |
| Weight | 35 kg |
| Dimensions | 520 x 280 x 540 mm (D-W-H) - 706 x 352 x 425 mm (D-W-H) |

ACCESSORI NECESSARI ACCESSORIES REQUIRED



Riduttore di
pressione per CO₂
Pressure reducer



Bombola CO₂
ricaricabile
4 o 10 Kg
CO₂ cartridge
rechargeable
4 or 10 kg